



POT/GB2004/004346



INVESTOR IN PEOPLE

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

07 DEC 2004

WIPO

PCT

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 

Dated 24 November 2004

BEST AVAILABLE COPY

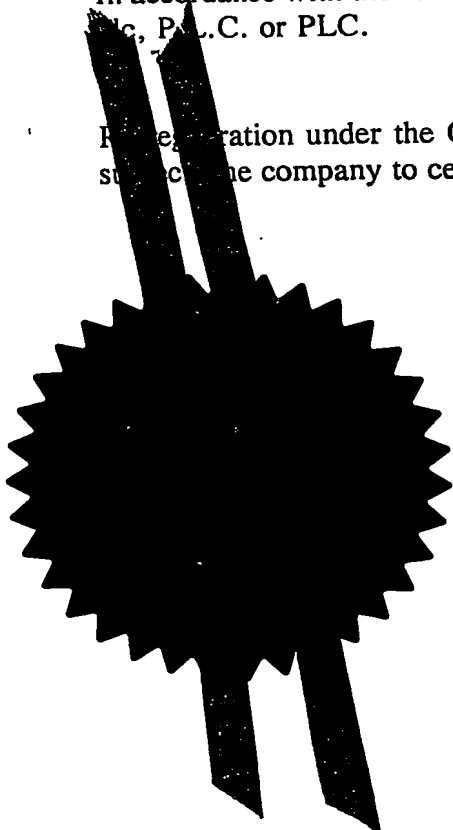

Patents 1977
(Rule 16)

The
Patent
Office



30OCT03 E848197-1 D01038
P01/7700 0.00-0325262.4

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

7555/P710073GB/AJC

2. Patent application number

(The Patent Office will fill in this part)

29 OCT 2003

0325262.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Michael HOBBS
Lawn View
Thorn Way
Long Itchington
Southam
Warwickshire CV47 9PF
United Kingdom

05568670002

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Improvements in or Relating to Tilting Vehicles

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS
Goldings House
2 Hays Lane
London
SE1 2HW

Patents ADP number (if you know it)

1776001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

NO

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 9

Claim(s) 4

Abstract -

Drawing (s) 6 + 6

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature *Adrian J Chettle* Date 28/10/2003

12. Name and daytime telephone number of person to contact in the United Kingdom Adrian J Chettle 01926 336111

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
b) Write your answers in capital letters using black ink or you may type them.
c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" at the relevant points. Any continuation sheet should be attached to this form.

Improvements in or Relating to Tilting Vehicles

The present invention relates to tilting vehicles.

5

It is known from EP0606191 to provide a three wheel tilting vehicle having a frame with one front wheel for steering and two driving rear wheels. Each rear wheel is mounted on a respective rearward facing swinging arm, each arm having a common balancer pivotably connected to the frame to provide dynamic and static stability to the vehicle. Each rear wheel is provided with a respective chain drive from a differential gear to permit the vehicle to negotiate corners. The common balancer connection allows the vehicle to lean when cornering so that the frame and the wheels are inclined relative to a road surface.

15 Several problems are associated with this kind of tilting vehicle. The arrangement of the rearward facing swinging arms requires the use of two chain final drives. Whilst the chain drives provide for a convenient power transmission they require periodic lubrication, adjustment and replacement, which is disadvantageous. Furthermore the rearward facing swinging arms are more suited to a relatively upright vehicle such as a motorbike, and may result in a longer wheelbase. There may also be undesirable torque steer effects.

20

What is required is an improved tilting vehicle which can overcome the aforementioned problems, and maximize road holding characteristics.

25

According to a first aspect of the invention there is provided a vehicle including a chassis having a fore and aft axis, a differential gear having a differential carrier, the differential carrier being pivotably mounted relative to the chassis about said axis, the differential gear having two opposite half shafts, each half shaft being connected to a respective wheel hub, the vehicle further including two opposite tie rods, each said wheel hub having one end of a respective tie rod pivotably connected thereto, the other end of the respective tie rod being pivotably connected to the chassis, the differential

30

carrier and the chassis having a control arm pivotably attached therebetween, whereby on cornering of the vehicle the control arm constrains the differential carrier to pivot relative to said chassis, in a predetermined manner.

- 5 A vehicle so arranged has the advantage that the angle through which rotary drive is transmitted is constrained when the vehicle executes a corner which controls the stress placed on the drive train. The stress is relieved by controlling the relative orientation of the differential carrier to a road surface. Use of the pivoting differential carrier permits drive shafts to be used as the final drive which is advantageous from a repair and
- 10 maintenance perspective. A vehicle having a pair of driving wheels so described has improved road holding characteristics when compared to a conventional non-tilting vehicle. Such a tilting vehicle may be operated with a higher cornering speed by virtue of the fact that the centre of gravity of the vehicle is lower to the ground as the vehicle tilts. A tilting vehicle according to the invention is also fun to drive because the frame
- 15 is able to tilt in the manner of a motorcycle whilst retaining the inherent stability and safety of a three or four wheel vehicle.

Each half shaft may be pivotably connected to a respective wheel hub via an outer universal joint.

20

In this specification by universal joint we means any coupling such as a hookes joint or a constant velocity joint which can accommodate an axial load and permits rotary drive to be transmitted at an angle.

- 25 The respective tie rods may be upper or lower tie rods relative to the associated half shaft, and in a preferred embodiment there are provided upper and lower tie rods, wherein the respective half shaft is arranged therebetween.

In a preferred embodiment each half shaft is pivotably connected to the differential gear with an inner universal joint.

5 Preferably at least one of the respective inner and outer universal joints provides for a change in length of the respective half shaft. This conveniently permits the drive shaft to plunge or extend should suspension movement require a change in length thereof. Controlled pivoting of the differential carrier relative to the road surface permits the drive train to be relieved of stress on cornering of the vehicle, and typically the differential carrier is arranged to pivot relative to the road surface through
10 approximately half of the angle of tilt of the vehicle relative to the road surface.

Preferably the respective tie rods are wishbones of conventional kind, such wishbones providing improved dynamic stability to the vehicle.

15 The vehicle may further be provided with a suspension means and in a preferred embodiment such suspension means includes a chassis arm pivotably connected to the chassis, the chassis arm having pivotably connected thereto a compressible suspension unit connected to respective upper tie rods. Alternatively the chassis arm may have a respective compressible suspension unit for a respective upper tie rod associated with
20 each wheels hub.

The differential carrier may be pivotably mounted on the chassis with bearings and in a preferred embodiment there are provided forward and rearward bearings for the differential carrier. Such bearings providing for relative tilting of the differential with
25 minimal friction.

Preferably the respective tie rods are pivotably mounted on a common upper collar, the upper collar being pivotably mounted on the chassis above the differential carrier. In a preferred embodiment the upper collar is coaxially mounted on an upper cylindrical
30 member of the chassis. Bearings may be provided between the upper collar and said upper cylindrical member to minimize friction.

In a preferred embodiment the chassis arm is fixed on the upper collar, and is preferably perpendicular to the ground in the static condition of the vehicle.

5 Preferably the respective lower tie rods are pivotably mounted on a common lower collar, the lower collar being pivotably mounted on the chassis underneath the differential carrier. In a preferred embodiment the lower collar is coaxially mounted on a lower cylindrical member of the chassis. Bearings may be provided between the lower collar and said lower cylindrical member to minimize friction. The axis of the upper and lower collars are preferably vertically aligned in the static condition of the vehicle.

10 Preferably a suspension arm is pivotably connected between the upper collar and lower collar. Such a suspension arm adjusts the relative movement of the respective upper tie rods relative to the lower tie rods. In the preferred embodiment the suspension arm ensures equal movement of the upper and lower tie rods. The control arm may be
15 pivotably connected between one of the upper and lower collars, and the differential carrier.

Preferably the vehicle further includes an engine which is fixed relative to the chassis. The engine may have a shaft drive output on said axis and connected to the differential.
20 Alternatively the engine may have a chain drive output perpendicular to said axis and driving a parallel lay shaft, the lay shaft having a universal joint connected to an input member of the differential, the input member on said axis so as to provide for pivoting of the engine relative to the differential carrier.

25 In an alternative arrangement the engine may be arranged to pivot with the differential carrier. Fixing the engine relative to the differential carrier in this manner avoids the requirement for the universal joint in the drive train.

pivotably attached therebetween, whereby on pivoting of the chassis about said axis the control arm constrains the differential carrier to pivot relative to said chassis, in a predetermined manner.

- 5 Such an alternative characterization is a useful assembly which may be used with other features of the invention described above.

Other features of the invention will be apparent from the following description of a preferred embodiment shown by way of example only in the accompanying drawing, in
10 which;

- Figure 1 is a schematic cross section of a pair of driving wheels for a vehicle according to the present invention.
- Figure 2 is a schematic cross section of the driving wheels of Figure 1 executing a
15 corner.
- Figure 3 is a schematic cross section of one of the pair of driving wheels of Figure 1 travelling over a bump.
- Figure 4 is a perspective line drawing of the differential shown in Figure 1.
- Figure 5 is a schematic cross section from one side of the differential of Figure 1.
- 20 - Figure 6 is a schematic plan view of the driving wheels of Figure 1.

Referring firstly to Figure 1 there is shown a schematic cross section of a pair of driving wheels for a vehicle according to the present invention, generally designated 10. Figure 1 shows a vehicle frame 12 with a differential 14. The differential 14 and frame 12 lie
25 on a common vertical centre line V. The differential 14 has two drive shafts 16, 18 which are each connected to a wheel 20, 22 by a respective Constant Velocity (CV) joint 21, 23. The wheels have profiled tyres, such as conventional motorcycle tyres, which are intended to operate at angles of inclination to a road surface. The drive shafts 16, 18 are connected to the differential with respective CV joints 25, 27. In the resting
30 condition the drive shafts 16, 18 lie on a horizontal centre line H.

In Figure 1 each wheel 20, 22 is provided with a respective upper wishbone 24, 26 and a respective lower wishbone 28, 30. Each upper wishbone 24, 26 is pivotably connected to a respective suspension unit 32, 34. Each suspension unit 32, 34 is pivotably connected to a frame arm 36, the frame arm 36 being pivotably connected to the frame 12. The upper wishbones 24, 26 are pivotably connected at 38, 40 to an upper part of the frame 12. The lower wishbones 28, 30 are pivotably connected 42, 44 to a lower part of the frame 12.

The differential 14 shown in Figure 1 is pivotably mounted 46 to the frame 12 about the intersection of the vertical centre line V and the horizontal centre line H. Pivoting of the differential 14 relative to the frame 12 is determined by a differential control arm 48 and a suspension control arm 50. The differential control arm 48 is pivotably connected to an upper part of the frame 12 at 52 and to the differential 14 at 54. The suspension control arm 50 is pivotably connected to an upper part of the frame 12 at 52 and to a lower part of the frame 12 at 56. The length A represents the distance of the pivotable connection 54 from the vertical centre line V. The length B represents the distance of the pivotable connections 52 and 56 from the vertical centre line V. The importance of the ratio of the lengths A:B will become apparent from the following description. Also shown in Figure 1 is a centre line W along which the CV joint 21 of the wheel 20, the pivotable connection 58 of the upper wishbone 24, and the pivotable connection 60 of the lower wishbone 28 lie.

Figure 2 shows a schematic cross section of the driving wheels of Figure 1 inclined at an angle of approximately 45° to a horizontal road surface 62 as the vehicle executes a corner. Like features shown in Figure 1 are shown with like reference numerals. As the pair of driving wheels 10 execute the corner the differential control arm 48 and the suspension control arm 50 determine the degree of pivoting to the differential relative

the CV joints 21, 23 of the wheels 20, 22 so that the drive train is maintained substantially about the horizontal centre line H. Such straightening of the power train eases the stress on the CV joints 21, 23, 25, 27 which do not operate as efficiently at large angles of deviation. Without the pivoting differential 14 the drive train would be under greater stress upon execution of a corner. It can also be seen in Figure 3 that as the pair of driving wheels 10 execute a corner the frame arm 36 is displaced from the vertical centre line V.

Now referring to Figure 3 there is shown a schematic cross section of one of the pair the driving wheels of Figure 1 going over a bump 64. As the wheel 20 goes over the bump 64 the differential control arm 48 and the suspension control arm 50 determine the degree of pivoting to the differential 14 relative to the frame 12. Angle μ represents the angle of deviation of the drive shaft 16 from the horizontal centre line H. Figure 3 shows that the operation of the suspension units 32, 34 whereby the angle α is half the angle μ such that the differential 14 pivots through half of the angle of the drive shaft 16.

Figure 4 shows a perspective line drawing of the differential 14 of Figure 1. In particular Figure 4 shows the detail of the left hand side of the differential 14. The wheels 20, 22 have been omitted for clarity. In Figure 4 the differential 14 is shown having a differential carrier 70. The differential carrier 70 is pivotably mounted to the frame 12 towards the front at 72 and towards the rear at 74. The pivot points 72, 74 lie on a front to back centre line F of the vehicle. A primary drive chain 76 from an engine (not shown) is connected to a universal coupling 78 which has a secondary chain 80 to drive the differential 14. The CV joint 25 between the differential 14 and the drive shaft 16 is also shown.

Also shown in Figure 4 is the vertical centre line V passing through the frame arm 36. The frame arm 36 is fixed to a top collar 82 which is pivotably mounted on the frame 12 via bearings 84, 86. The top wish bone 24 is pivotably mounted to the top collar 82. A similar arrangement for the bottom wish bone 28 is shown towards the bottom of the frame 12 whereby the bottom wish bone 28 is pivotably mounted on a bottom collar 88.

The bottom collar 88 is pivotably mounted on the frame 12 via bearings 90, 92. Also shown in Figure 4 is the connection of the differential control arm 48 and the suspension control arm 50. One end of the differential control arm 48 is pivotably connected to a first member 94 which is fixed to the differential carrier 70. The other end of the differential control arm 48 is pivotably connected to a second member 96 which is fixed to the top collar 82. One end of the suspension control arm 50 is pivotably connected to the second member 96, the other end of the suspension control arm 50 is pivotably connected to a third member 98 which is fixed to the bottom collar 88. In Figure 4 the universal joint 78 can be omitted if the engine (not shown) is arranged to pivot relative to the frame 12 in a similar manner to the pivoting of the differential 14 relative to the frame 12. It will also be appreciated that whilst drive chains 76, 80 are shown the drive chains 76, 80 could be substituted for a drive shaft from the engine (not shown).

- 15 Now turning to Figure 5 there is shown a schematic cross section from one side of the differential of Figure 1. In Figure 5 the differential carrier 70 is shown pivotably mounted to the frame 12 towards the front at 72 and towards the rear at 74. The top collar 82 and the bottom collar 88 are also shown pivotably mounted on the frame 12.
- 20 In Figure 6 there is shown a schematic plan view of the driving wheels of Figure 1, generally designated 10. The horizontal centre line H, and the front to back centre line F of the frame 12 are shown. The top collar 82 pivotably mounted on the frame 12 with bearings 84, 86 is also shown. The frame arm 36 fixed to the top collar 82 and having suspension units 32, 34 pivotably connected thereto are also illustrated as well as the arrangement of the respective upper wishbones 24, 26 and the respective lower wishbones 28, 30. The primary drive chain 76 is illustrated running parallel to the front to back centre line F.
- 25

A vehicle having a pair of driving wheels so described may have improved road holding characteristics when compared to a conventional non-tilting vehicle. Such a tilting vehicle may be operated with a higher cornering speed by virtue of the fact that the
5 centre of gravity of the vehicle is lower to the ground as the vehicle tilts. Such a tilting vehicle may also have improved cornering safety. A vehicle so described combines the advantages of a two wheel motorcycle which tilts with the four wheels safety of a car.

It will be understood that various conventional changes to the suspension and drive
10 shaft arrangement may be made to suit particular circumstances. For example, the ride height of the chassis may be adjusted with the consequence that the drive shafts may not be horizontal in the rest condition. The upper and lower drive shafts may be of unequal length so as to, for example, give a positive camber at rest.

15

20

25

30

Claims

1. A vehicle including a chassis having a fore and aft axis, a differential gear
5 having a differential carrier, the differential carrier being pivotably mounted relative to the chassis about said axis, the differential gear having two opposite half shafts, each half shaft being connected to a respective wheel hub, the vehicle further including two opposite tie rods, each said wheel hub having one end of a respective tie rod pivotably connected thereto, the other end of the respective tie rod being pivotably connected to
10 the chassis, the differential carrier and the chassis having a control arm pivotably attached therebetween, whereby on cornering of the vehicle the control arm constrains the differential carrier to pivot relative to said chassis, in a predetermined manner.
2. A vehicle according to claim 1, wherein the respective tie rods are
15 pivotably mounted on a common upper collar, the upper collar being pivotably mounted on the chassis above the differential carrier.
3. A vehicle according to claim 2, wherein the upper collar is coaxially
20 mounted on an upper cylindrical member of the chassis.
4. A vehicle according to claim 3, wherein bearings are provided between the upper collar and said upper cylindrical member to minimize friction.
5. A vehicle according to any of claims 2-4, wherein two opposite pairs of tie
25 rods are provided above and below the respective half shaft.
6. A vehicle according to claim 5, wherein respective tie rods are pivotably mounted on a common lower collar, the lower collar being pivotably mounted on the chassis below the differential carrier.

8. A vehicle according to claim 7, wherein bearings are provided between the lower collar and said lower cylindrical member to minimize friction.

9. A vehicle according to any of claims 2-8, wherein each of the upper and lower collars have a radius arm extending therefrom on the same side, a suspension arm being pivotably connected between the radius arms.

10. A vehicle according to claim 9, wherein the radius arms are of equal length.

11. A vehicle according to claim 9 or claim 10, wherein the radius arms are parallel.

12. A vehicle according to any of claims 9-11, wherein the control arm is pivotably connected between one of the radius arms and a radius member of the differential carrier.

13. A vehicle according to claim 12, wherein the radius member is longer than the radius arm connected thereto.

14. A vehicle according to claim 12 or claim 13, wherein the radius member and the associated radius arm are parallel.

15. A vehicle according to claim 14, wherein the radius member is twice as long as the radius arm.

16. A vehicle according to any of claims 2-15, wherein the vehicle further includes a suspension means operatively connected between said chassis and respective wheel hubs and having opposite attachment points, said suspension means being operable to permit vertical movement of the chassis relative to the ground.

17. A vehicle according to claim 16, wherein the suspension means includes a chassis arm pivotably connected to the chassis, said chassis arm being pivotably connected to one of said attachments points.
- 5 18. A vehicle according to claim 17, the suspension means comprising opposite compressible suspension units, wherein both units are pivotably connected to said chassis arm.
19. A vehicle according to claim 17 or claim 18, wherein the chassis arm
10 extends from said upper collar, and is perpendicular to the ground in the rest condition of the vehicle.
20. A vehicle according to any preceding claim, wherein the fore and aft axis is on a geometric centre line of the vehicle.
- 15 21. A vehicle according to any preceding claim, wherein the fore and aft axis passes through a centre of mass of the vehicle.
22. A vehicle according to any preceding claim, wherein each half shaft is
20 pivotably connected to a respective wheel hub via an outer universal joint.
23. A vehicle according to claim 22, wherein each half shaft is pivotably connected to the differential gear with an inner universal joint.
- 25 24. A vehicle according to claim 23, wherein at least one of the respective inner and the outer universal joints provides for a change in length of the respective half shaft.

26. A vehicle according to any preceding claim, the vehicle further including an engine, wherein the engine has a shaft drive output on said axis and connected to the differential.

5 27. A vehicle according to any of claims 1-25, wherein the vehicle further includes an engine, the engine having a drive output perpendicular to said axis and driving a parallel lay shaft, the lay shaft having a universal joint connected to an input member of the differential, the input member being on said axis so as to provide for pivoting of the engine relative to the differential carrier.

10 28. A vehicle according to any preceding claim, wherein the engine is connected to the differential carrier.

15 29. A vehicle as substantially described herein with reference to Figures 1-6 of the accompanying drawings.

20 30. A drive train assembly for a vehicle including a chassis having a fore and aft axis, a differential carrier and a control arm, the differential carrier being pivotably mounted relative to the chassis about said axis, the differential carrier and the chassis having a control arm pivotably attached therebetween, whereby on pivoting of the chassis about said axis the control arm constrains the differential carrier to pivot relative to said chassis, in a predetermined manner.

25 31. A drive train assembly as substantially described herein with reference to Figures 1-6 of the accompanying drawings.

1/6

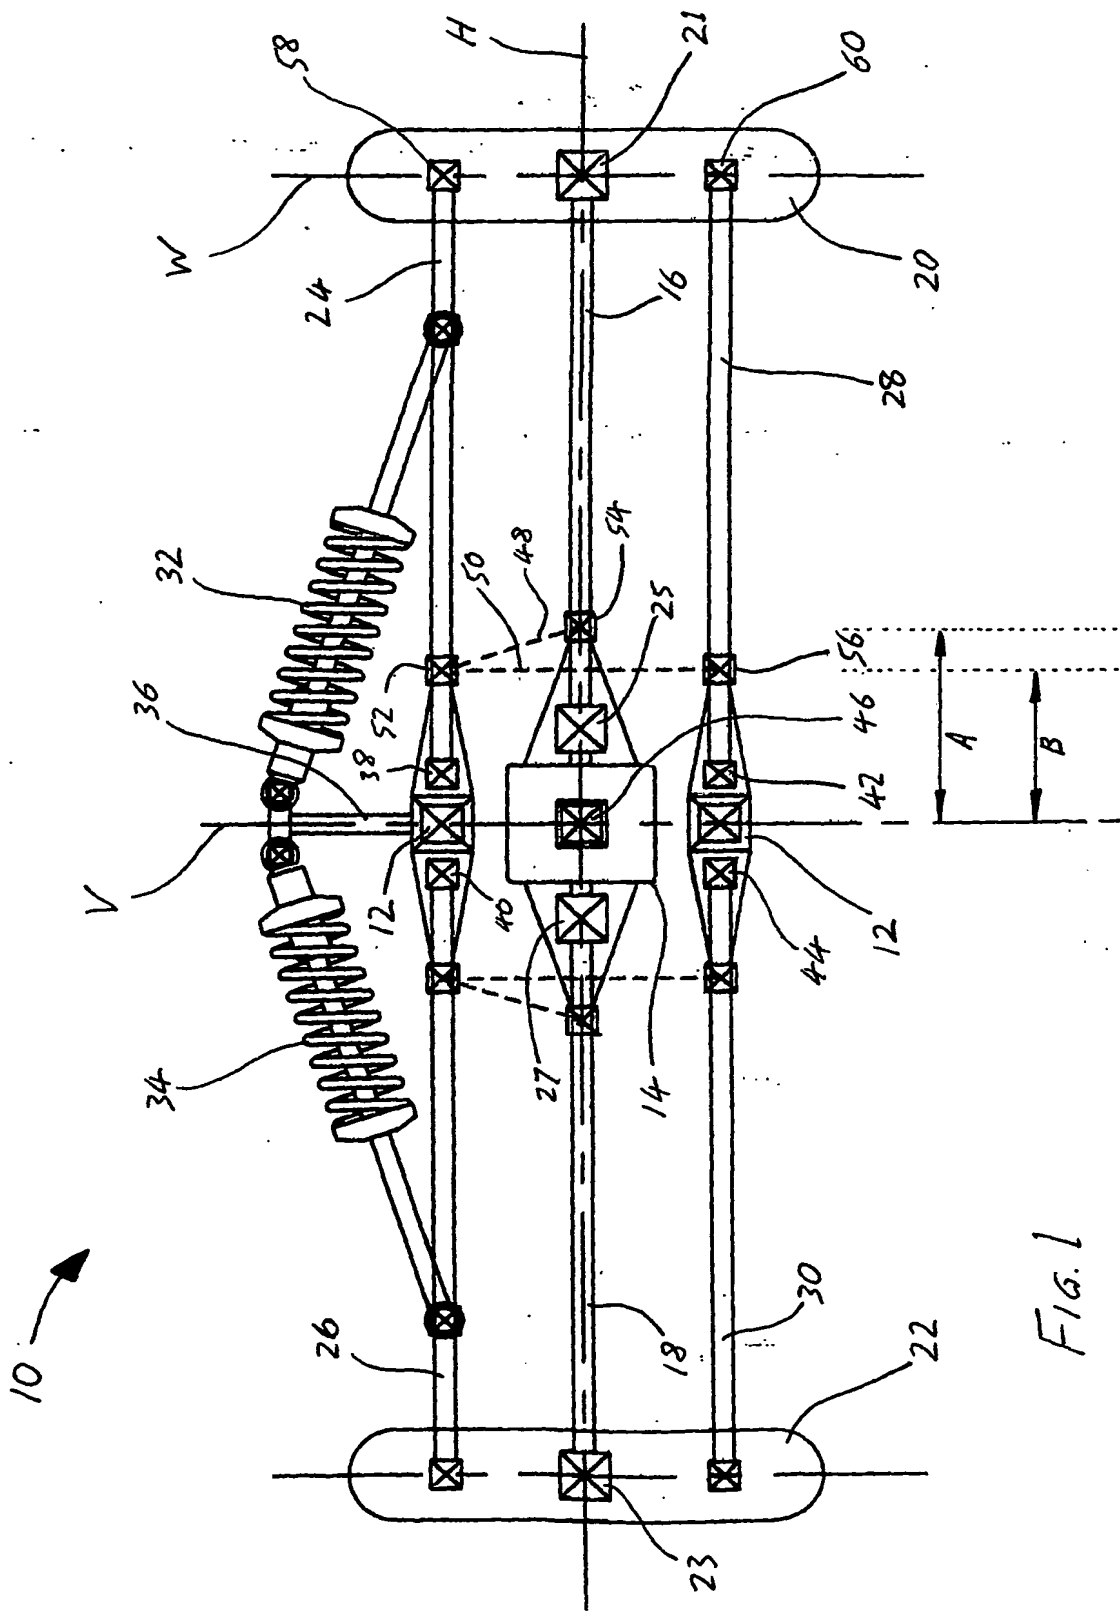
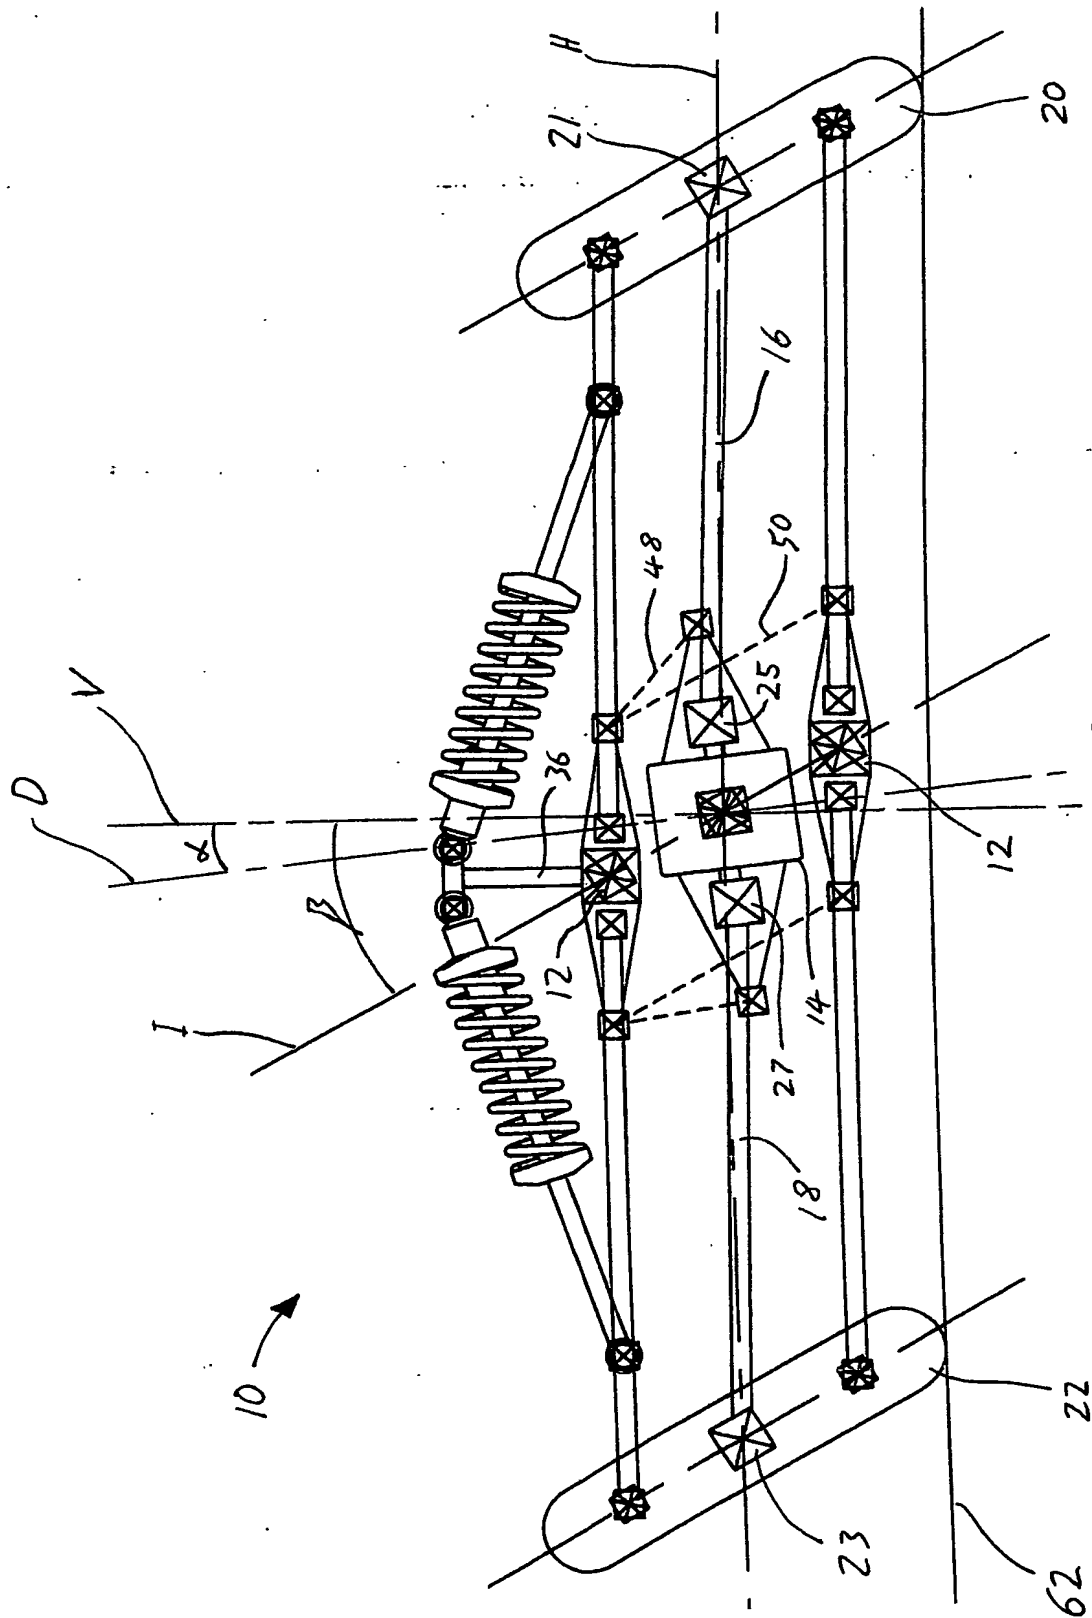


FIG. 1



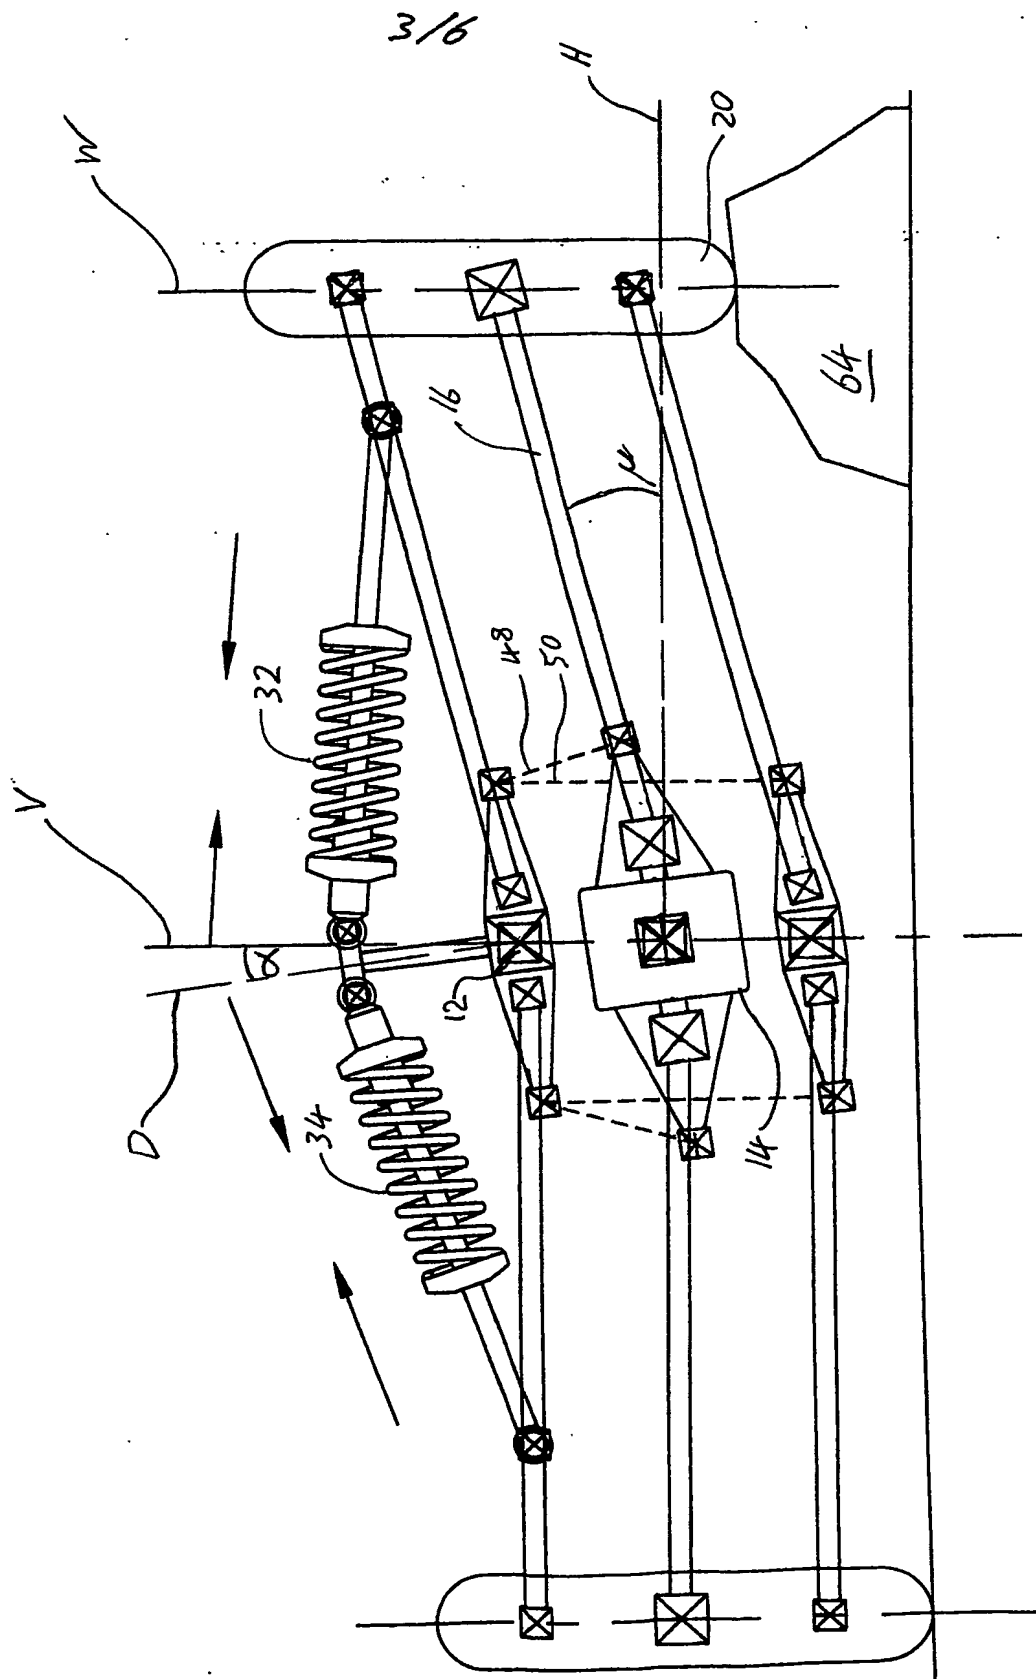


FIG. 3

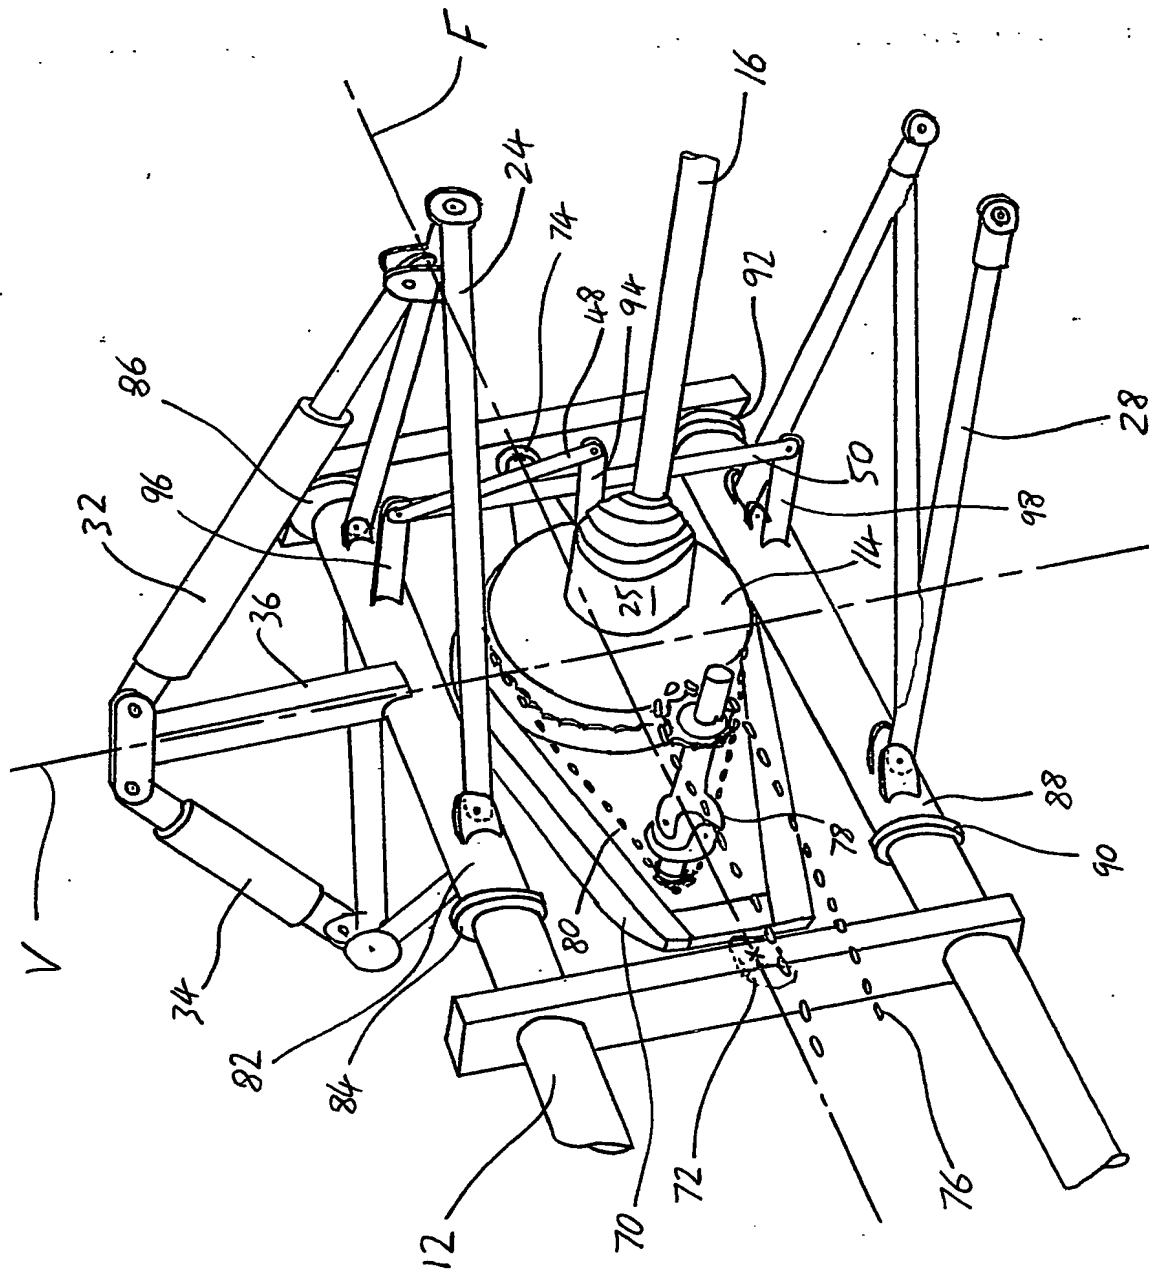


Fig. 4

5/6


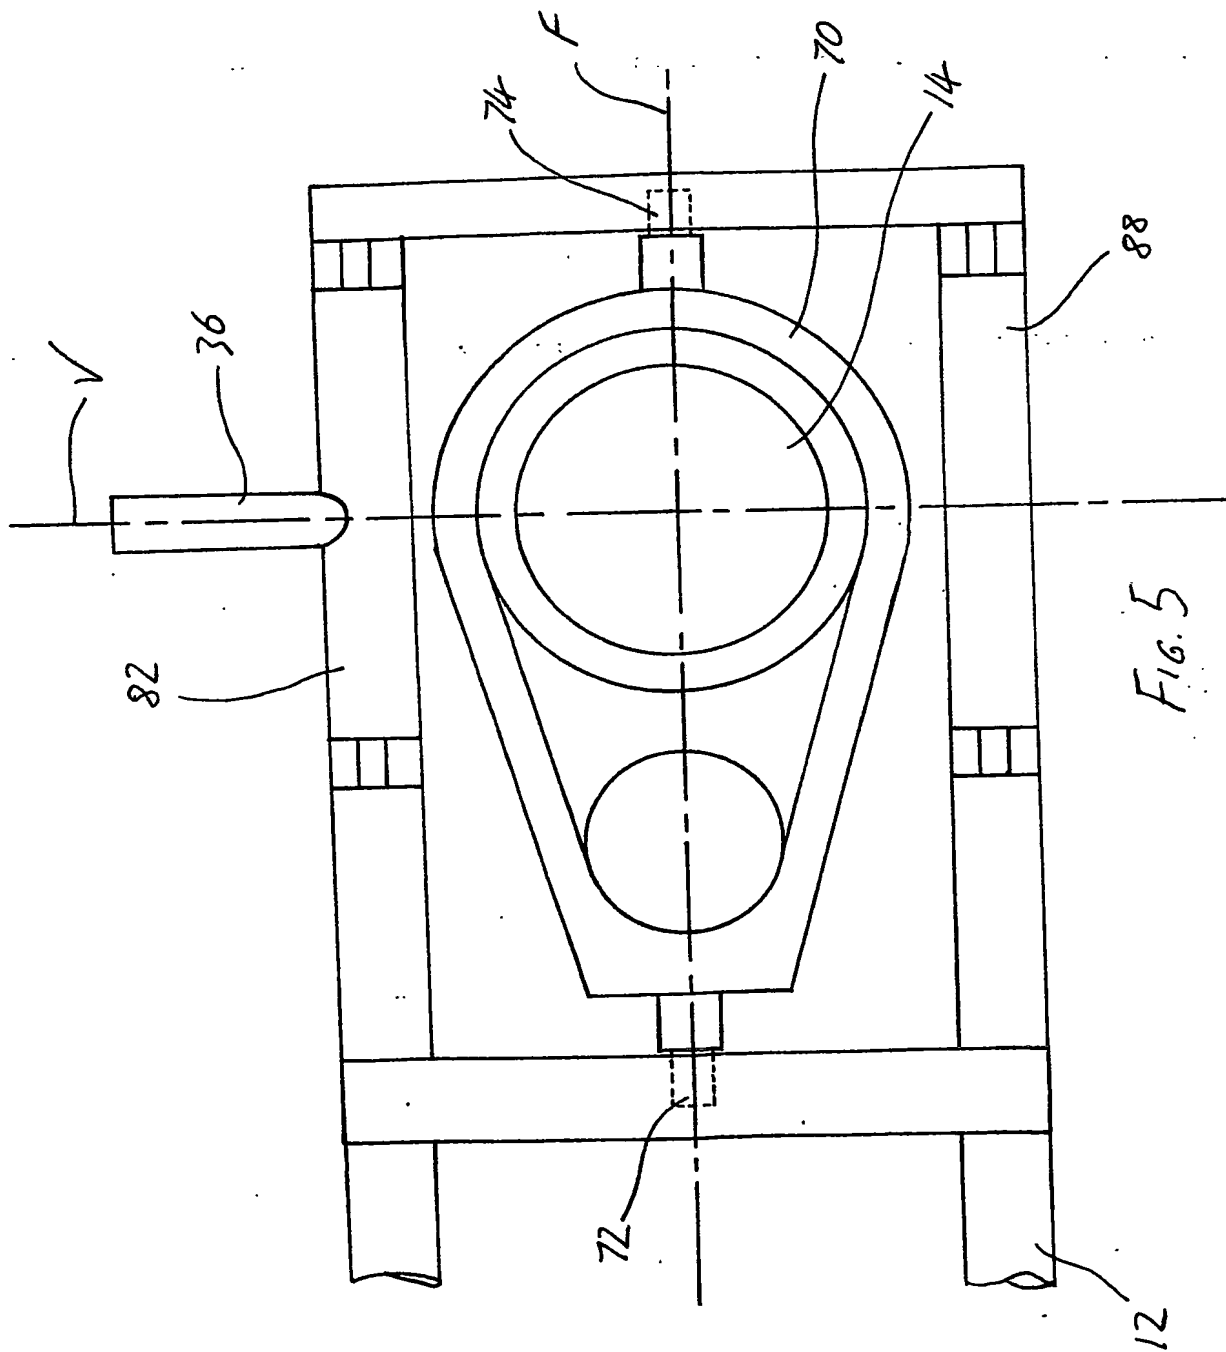


FIG. 5

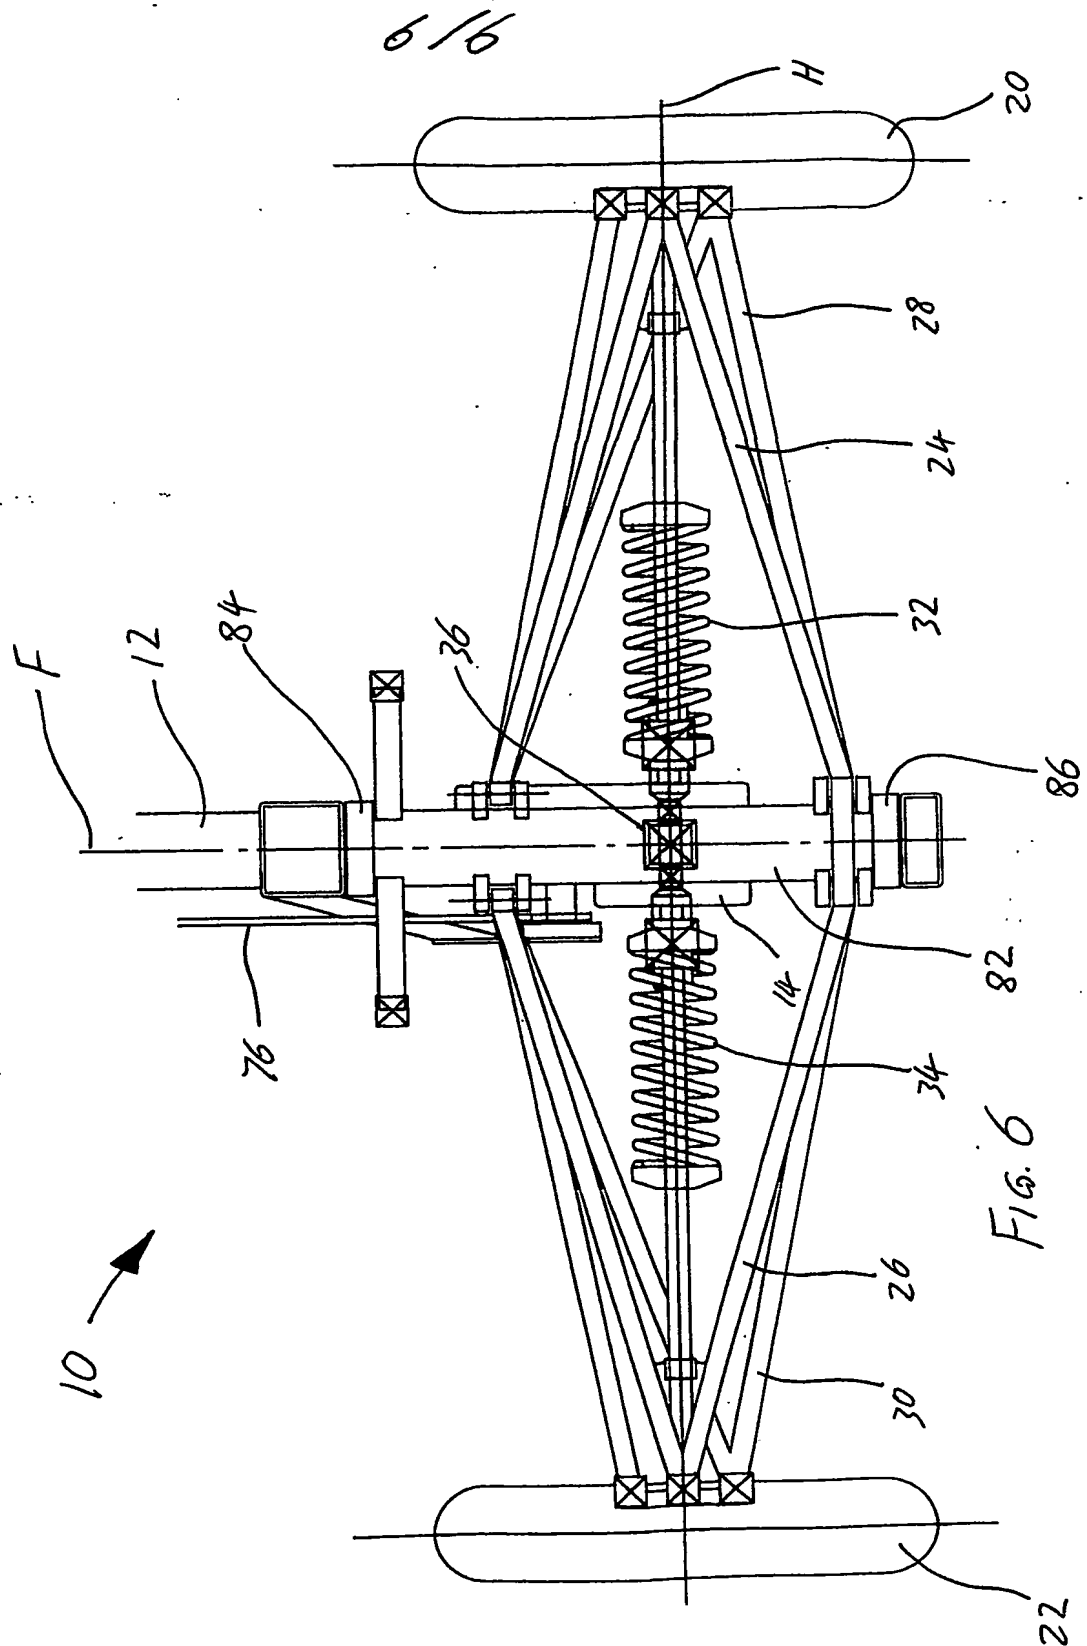

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.